




# TRANSHOW INDUSTRY LIMITED

GAOYANG RD, ZHOUSHAN VILLAGE, JIANGSHAN TOWN  
 YINZHOU DISTRICT, NINGBO CITY, 315100 CHINA  
 Tel: +86-574-8736.7873 Fax: +86-574-8736.4349  
[www.transhow.net](http://www.transhow.net) Email: [transhow@transhow.net](mailto:transhow@transhow.net)

## Modified Truss Head Self Drilling Screws

### Black Phosphated or Zinc Plated

Please note there is no single standard for this modified truss head self drilling screws. Below drawings and dimensions are producer's common supply. Specifications may differs for various markets and customer's request

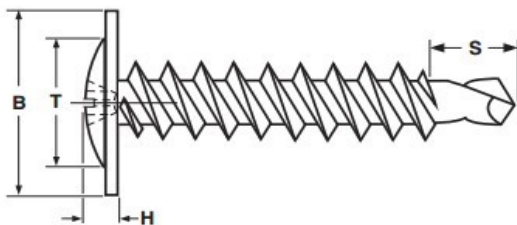

All dimensions in inch standard												
Nominal Size & Number of Threads per inch	B		H		D1		D2		Point Size	S		Phillips Driver Size
	Overall Head Diameter		Total Head Height		Minor Diameter		Major Diameter			Point Length		
	Max	Min	Max	Min	Max	Min	Max	Min		Max	Min	
6-20	.401	.385	.099	.070	.104	.098	.139	.131	#2	.158	.117	2
8-18	.446	.426	.098	.082	.122	.116	.165	.161	#2	.197	.149	2
10-16	.441	.425	.098	.079	.141	.135	.189	.183	#2	.228	.118	2
10-16	.441	.425	.098	.079	.141	.135	.189	.183	#3	.307	.256	2
12-14	.464	.440	.124	.092	.164	.156	.215	.208	#3	.315	.275	3
1/4-14	.484	.459	.144	.121	.192	.184	.246	.239	#3	.374	.334	3
Tolerance on Length												
		Nominal Screw Size		Nominal Screw Length								
				Thru 1 in.			Over 1" to 2" incl.			Over 2 in.		
		#5 thru #10		+0, -.03"			+0, -.047			+0, -.06		
		#12 thru 1/4"		+0, -.03"			+0, -.05"			+0, -.06"		