





TRANSHOW SCREW FACTORY

GAOYANG RD, ZHOULAN VILLAGE, JIANGSHAN TOWN
 YINZHOU DISTRICT, NINGBO CITY, 315100 CHINA
 Tel: +86-574-8736.7873 Fax: +86-574-8736.4349
www.transhow.net Email: transhow@transhow.net

Slotted Drive

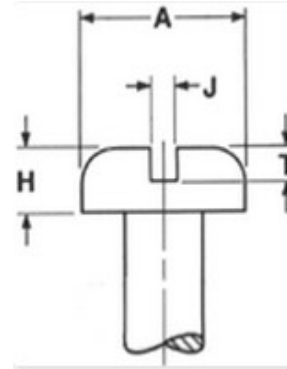

Phillips Drive

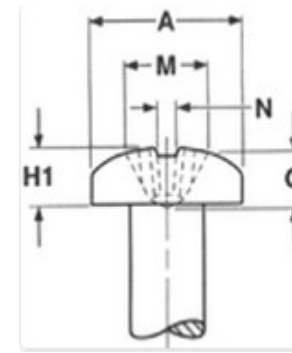

Pan Head Slotted Drive or Phillips Drive

Inch Series according to ANSI/ASME standard

Nomin Size	A		H		H1		J		T		M		G	N	Phillip Driver Size
	Head Diameter		Height of Head				Width of Slot		Depth of Slot		Dimensions of Recess				
			Slotted		Recessed						Diameter		Depth	Width	
	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	
2	0.167	0.155	0.053	0.045	0.062	0.053	0.031	0.023	0.031	0.022	0.104	0.091	0.059	0.017	1
3	0.193	0.180	0.060	0.051	0.071	0.062	0.035	0.027	0.036	0.026	0.112	0.099	0.068	0.019	1
4	0.219	0.205	0.068	0.058	0.080	0.070	0.039	0.031	0.040	0.030	0.122	0.109	0.078	0.019	1
5	0.245	0.231	0.075	0.065	0.089	0.079	0.043	0.035	0.045	0.034	0.158	0.145	0.083	0.028	2
6	0.270	0.256	0.082	0.072	0.097	0.087	0.048	0.039	0.050	0.037	0.166	0.153	0.091	0.028	2
7	0.296	0.281	0.089	0.079	0.106	0.096	0.048	0.039	0.054	0.041	0.176	0.163	0.100	0.029	2
8	0.322	0.306	0.096	0.085	0.115	0.105	0.054	0.045	0.058	0.045	0.182	0.169	0.108	0.030	2
10	0.373	0.357	0.110	0.099	0.133	0.122	0.060	0.050	0.068	0.053	0.199	0.186	0.124	0.031	2
12	0.425	0.407	0.125	0.112	0.151	0.139	0.067	0.056	0.077	0.061	0.259	0.246	0.141	0.034	3
1/4"	0.492	0.473	0.144	0.130	0.175	0.162	0.075	0.064	0.087	0.070	0.281	0.268	0.161	0.036	3
5/16"	0.615	0.594	0.178	0.162	0.218	0.203	0.084	0.072	0.106	0.085	0.350	0.337	0.193	0.169	4
3/8"	0.740	0.716	0.212	0.195	0.261	0.244	0.094	0.081	0.124	0.100	0.389	0.376	0.233	0.210	4